
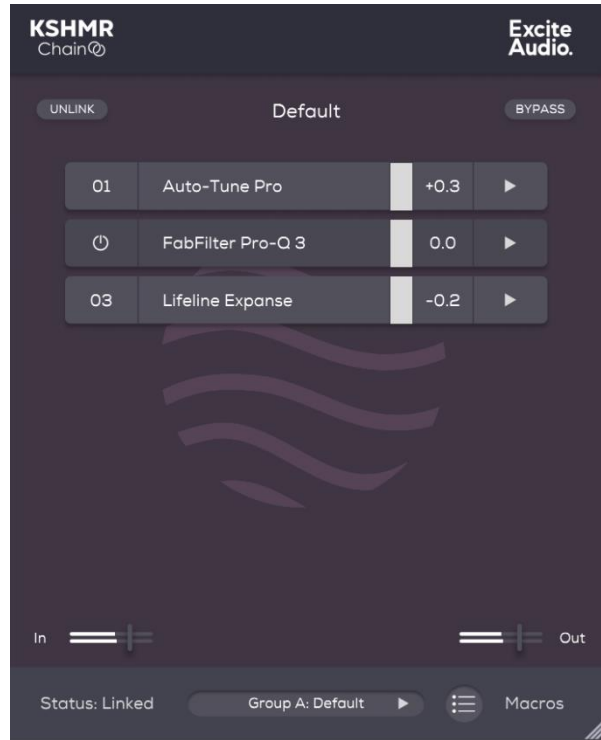



KSHMR Chain

User Manual

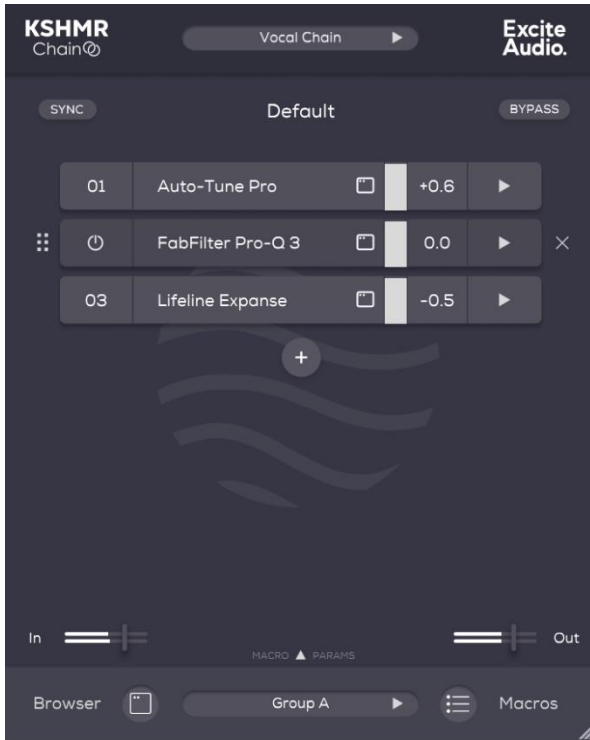


Getting Started


1. In your DAW, load the **Leader** plugin on a channel you wish to add a chain of plugins to, and Load the **Follower** plugin on a channel you wish to copy this same chain of plugins to.

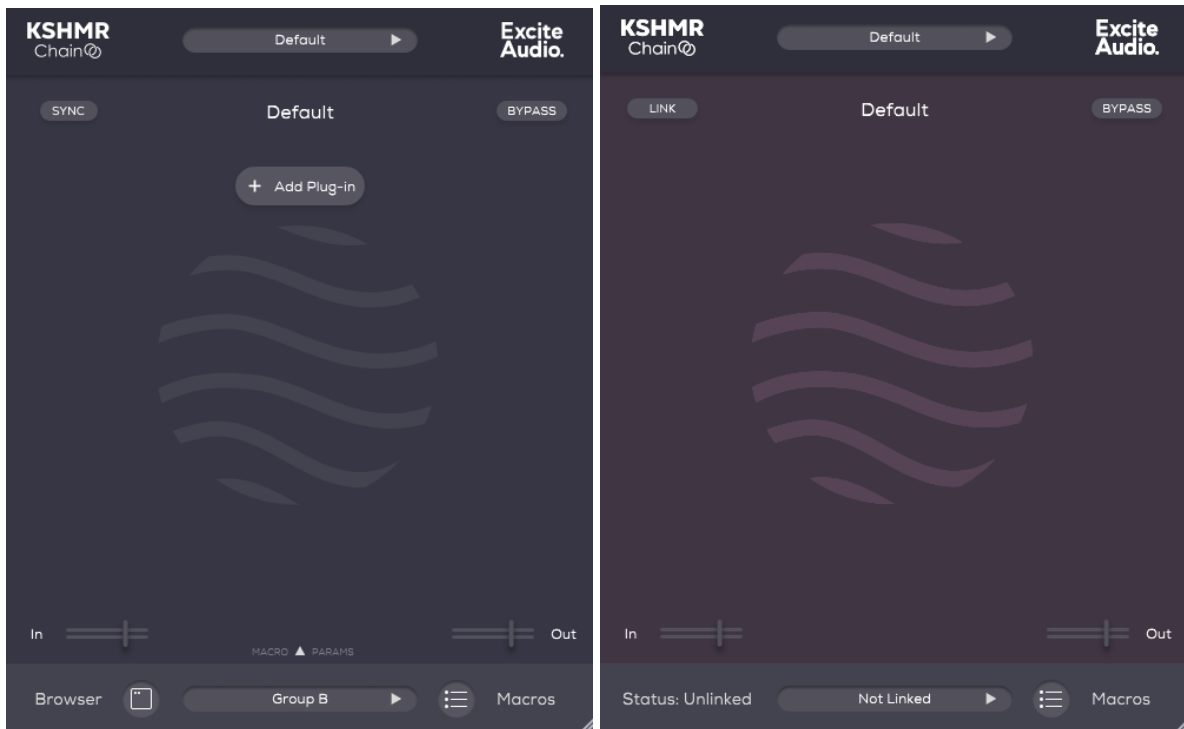


2. Click 'Add Plug-in'.

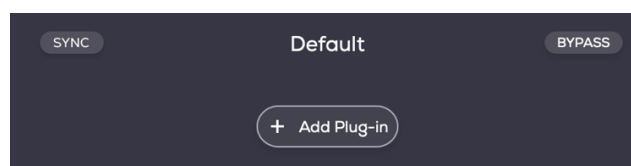


3. Select the plug-ins you wish to add to your chain.

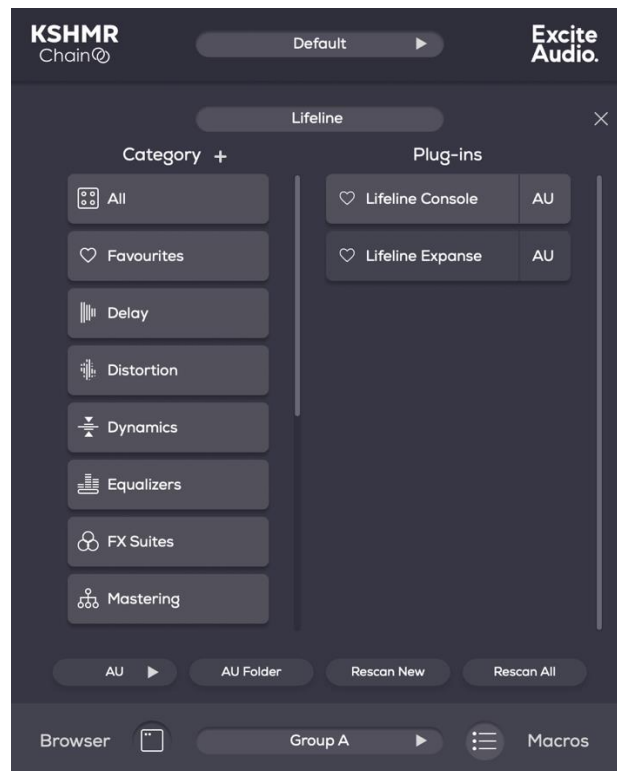

4. Create your plug-in chain.

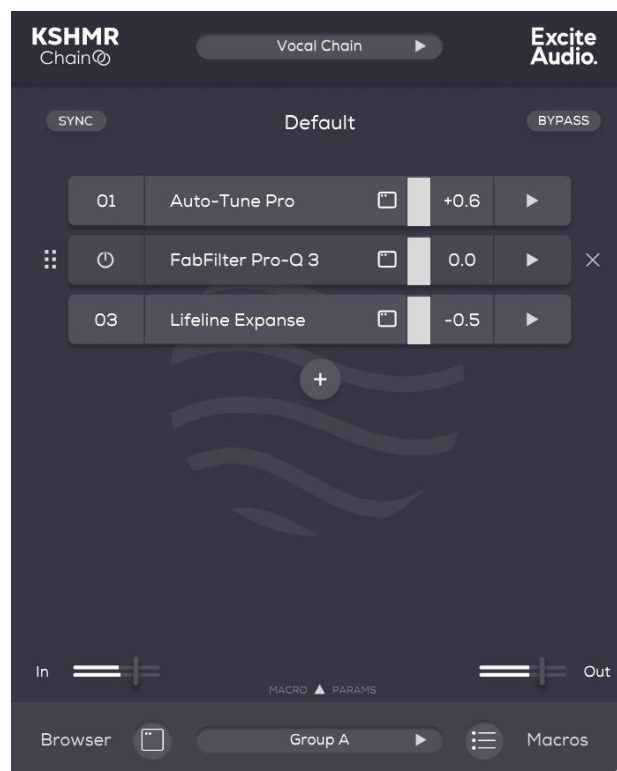

5. On the **Follower** plug-in, click the 'Not Linked' box at the bottom of the plug-in window. Then click 'Group A: Default' at the top of the list.


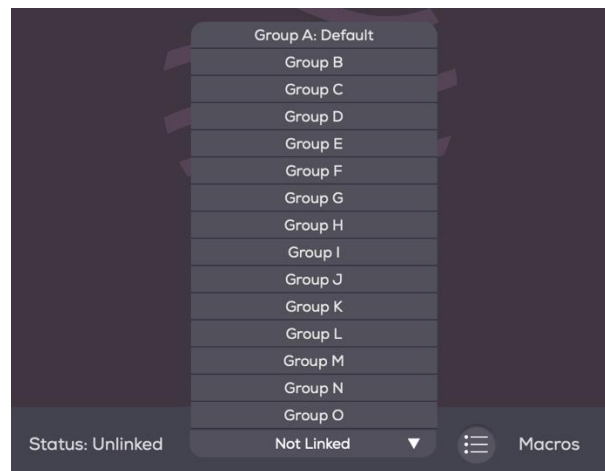


6. The **Follower** is now linked to the **Leader** and all plug-ins in the chain have been copied to the **Follower**.



Leader - Main Page

- Preset Browser** - Save and load your presets.
- Chain Name** - Click here to rename your plugin chain.
- Plugin Number** - This is the plugin's position in the chain.
- Plugin Name** - Click the plugin name to view the plugin interface.
- Browse Plugins** - Opens the browser to swap the plugin.
- Move Plugin** - Click and drag this icon or anywhere on the plugin to move its position.
- On/Off** - Bypasses the plugin.
- Delete Plugin** - Removes the plugin from the chain.
- Gain Meter** - shows the output volume up to 0db.
- RMS Meter** - shows the change in RMS loudness caused by this plugin.
- + -** Add a plugin to the chain.

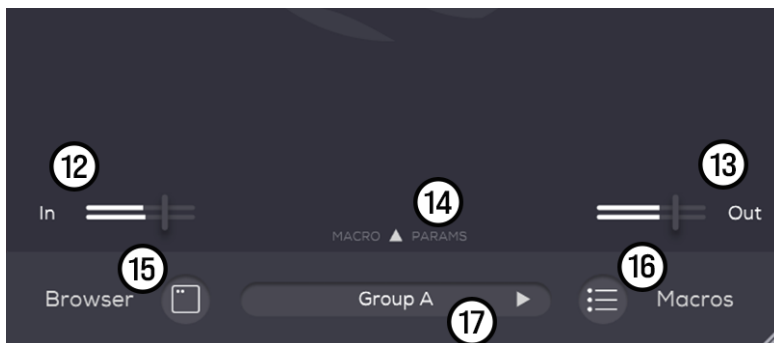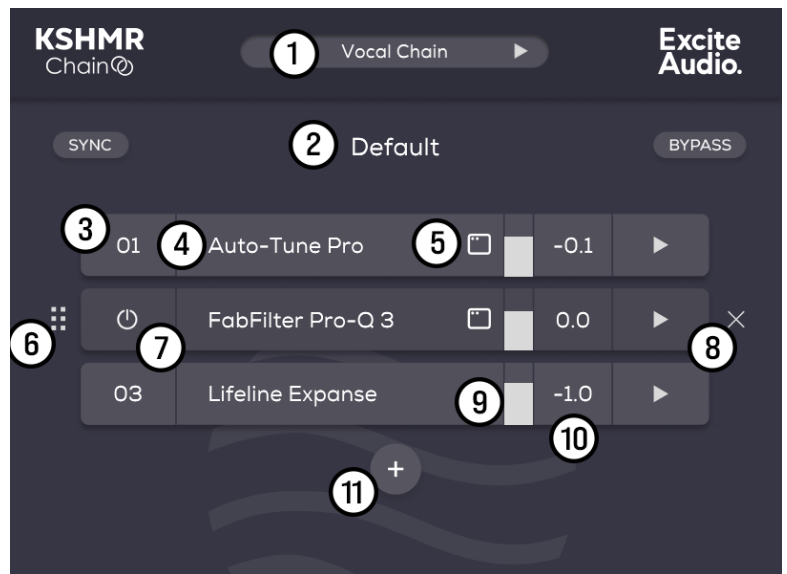


- Global In** - Global input gain.
- Global Out** - Global output gain.
- Macros** - View the 10 macro knobs.
- Browser** - Opens the plugin Browser page.
- Macros** - Opens the Macros page.
- Group Selection** - Assigns this chain to a group for the Follower to link to.

Additional Controls

- Arrow** - Open Parallel processing controls.
- Indicator** - Tells you whether parallel processing is active.
- In** - Controls input gain.
- Dry** - Controls the level of the dry signal
- Wet** - Controls the level of the wet signal.
- On/Off** - Turns Parallel processing On/Off



7. **Oversampling** – Choose up to 16x Oversampling per plugin.
8. **Auto Make-Up Gain** – Click once to automatically set the gain so that there is no change in RMS loudness caused by this plugin in the chain
9. **Out** – Controls the overall output level of this plugin.

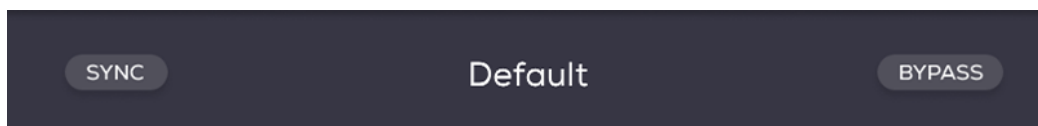


- **Sync** - Forces the state of all linked followers to the state of the Leader
- **Bypass** - Bypasses processing done by KSHMR Chain.

Tip: Right click on the **Bypass** button to select whether you would like to bypass just the **Leader** or all its **Followers** as well.


Leader - Browser Page

1. **Search Bar** - Search for the plugins in your collection.
2. **Exit** - Click to here to exit the plugin Browser Page.
3. **Category** - Folders of plugins are organised by type. Click + to add a custom folder.
4. **Favourites** - This is the folder where your favoured plugins are saved.
5. **Plugins** - This is the list of your plugins. Double click any plugin to add it to the chain.
6. ♥ - Click the heart to favourite a plugin.
7. **All/VST/VST3/AU** - Filter your search result by format.
8. **Folder** - Navigate to your VST/VST3/AU folder.
9. **Rescan New** - Rescan your system for new plugins.
10. **Rescan All** - Rescan all the plugins on your system.

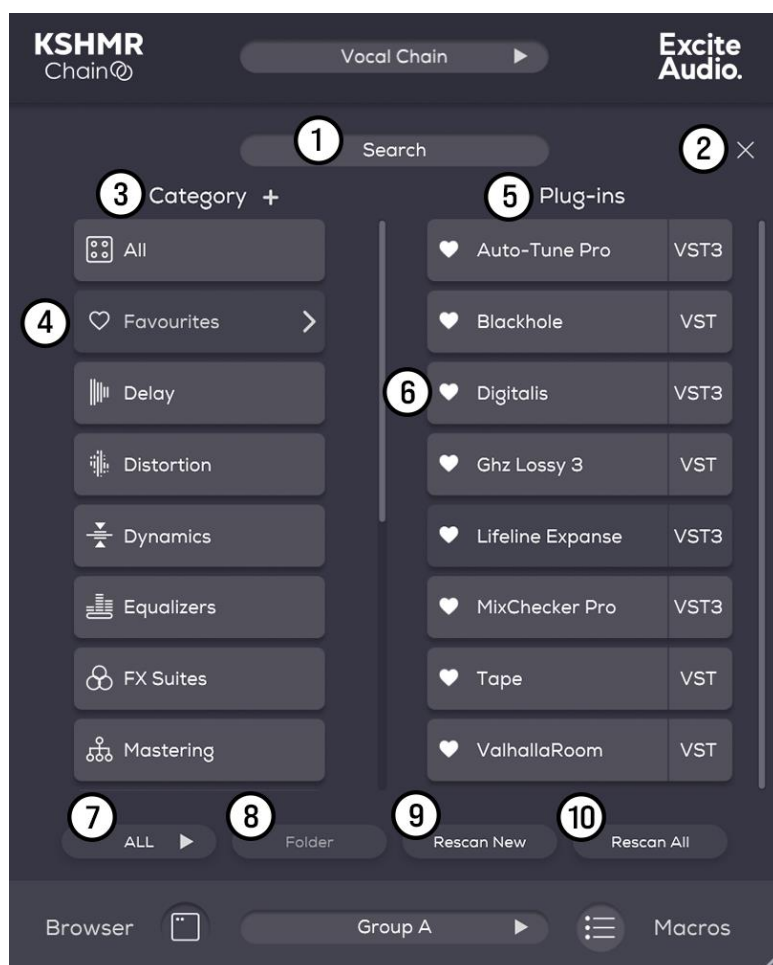

Leader – Macros Page

1. **Source** - Choose the macro you want to assign plugin parameters to.
2. **Plugin** - Choose the plugin you want to be controlled by the macro.
3. **Parameter** - Choose the parameter of the plugin you want to control.
4. **Min** - Choose the minimum value of the parameter.
5. **Max** - Choose the maximum value of the parameter.
6. **Learn** - After Clicking **L**, the next plugin parameter adjusted will be assigned to the macro.

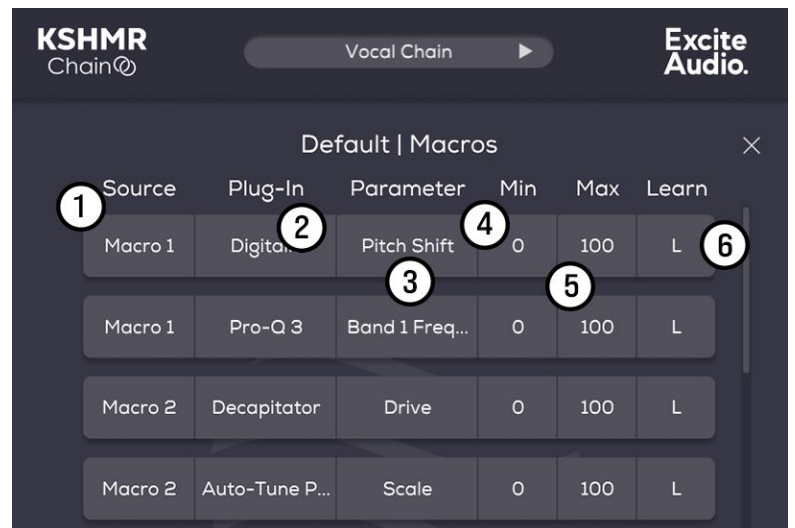

Follower – Main Page

1. **Unlink** - Unlinks the from the Leader (to make follower specific adjustments).
2. **Bypass** - Bypasses the follower.
3. **On/Off** - Turn off the plugin in the chain.
4. **Arrow** - Open Parallel processing controls.
5. **In** - Global Input gain
6. **Out** - Global Output gain
7. **Status** - Displays whether the Follower is linked or unlinked.
8. **Group** - Assigns this Follower to a Leader.
9. **Macro** - Opens the Follower Macro page.

